

CONDUCTION COOLED CAPACITORS

FP-9-200 Conduction Cooled Capacitors
For Induction Heating




Highlights

- Conduction cooled
- Polypropylene dielectric
- Self-healing
- Stray inductance < 5nH
- Operating frequency up to 650 KHz



Specifications


Rated Voltage Vrms	Nominal Capacitance Mfd at 1Khz	Max. current Irms	Max. power Kvar	Frequency KHz	ESR mΩ	Dimensions mm			Terminal Style
						B	H	L	
700	0.18	350	200	350-550	1.5	30.2	50	75	AL
	0.24	400	200	280-530	1.2	30.2	50	75	AL
	0.33	350	200	190-300	1.0	30.2	50	75	AL
600	0.66	450	200	130-240	0.8	30.2	50	75	AL
500	1.2	500	200	110-170	0.6	30.2	50	75	AL
400	2.4	500	200	83	0.4	30.2	50	75	AL

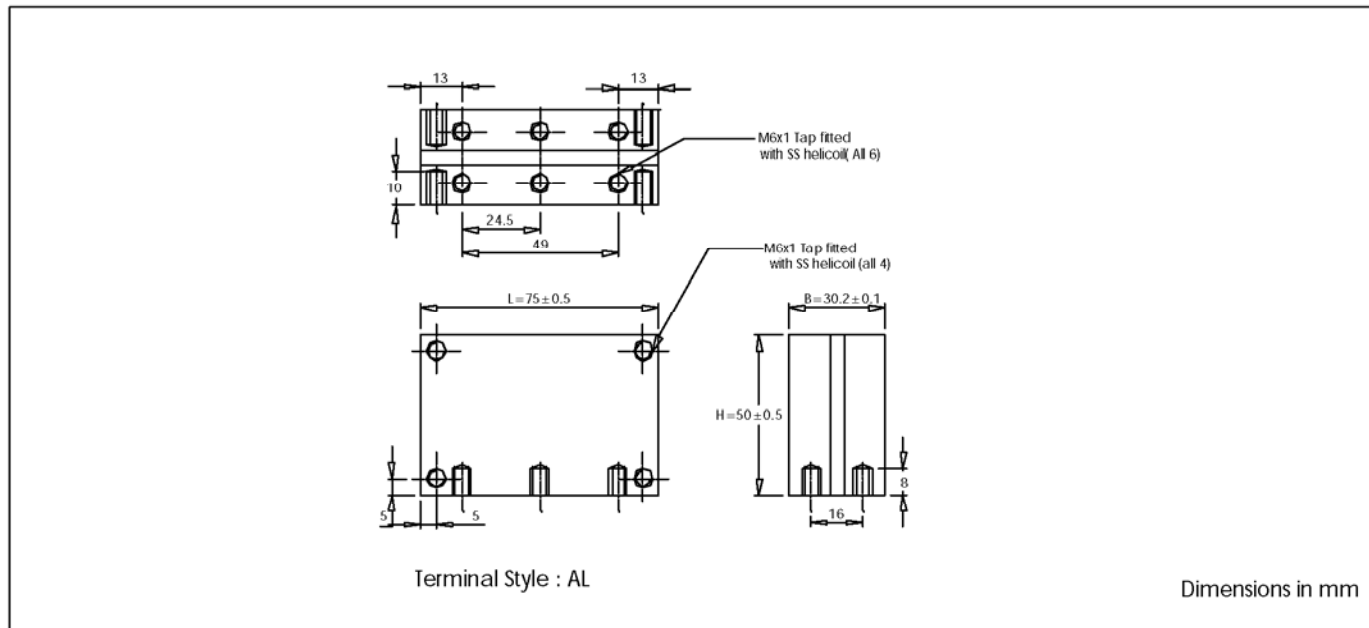

CONDUCTION COOLED CAPACITORS

FP-9-200 Conduction Cooled Capacitors
For Induction Heating


Frequency Derating

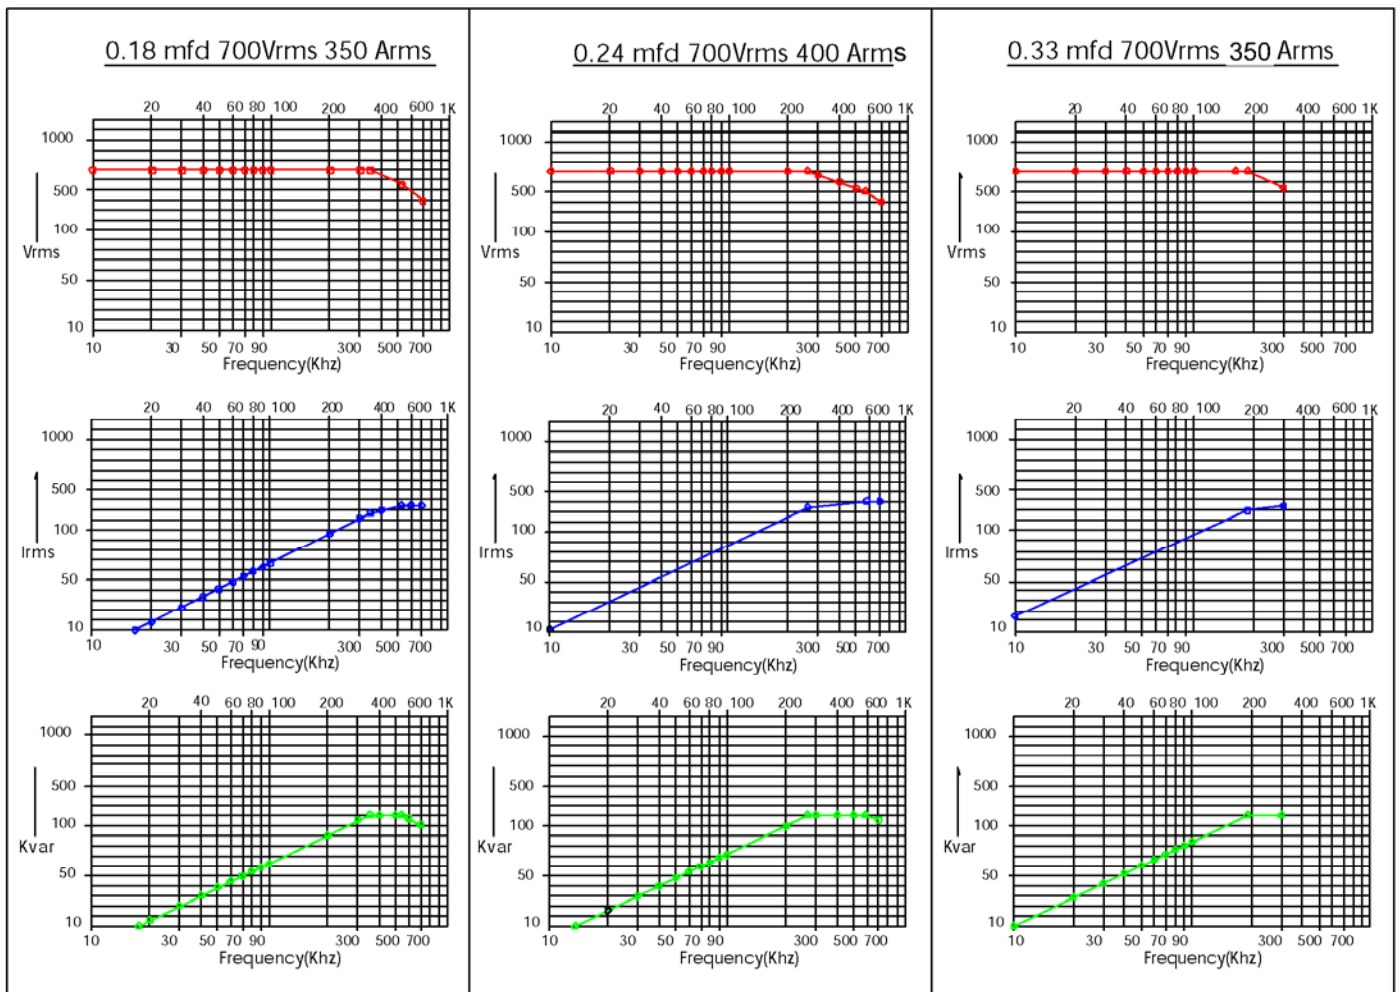

CONDUCTION COOLED CAPACITORS

FP-9-200 Conduction Cooled Capacitors
For Induction Heating

Frequency Derating

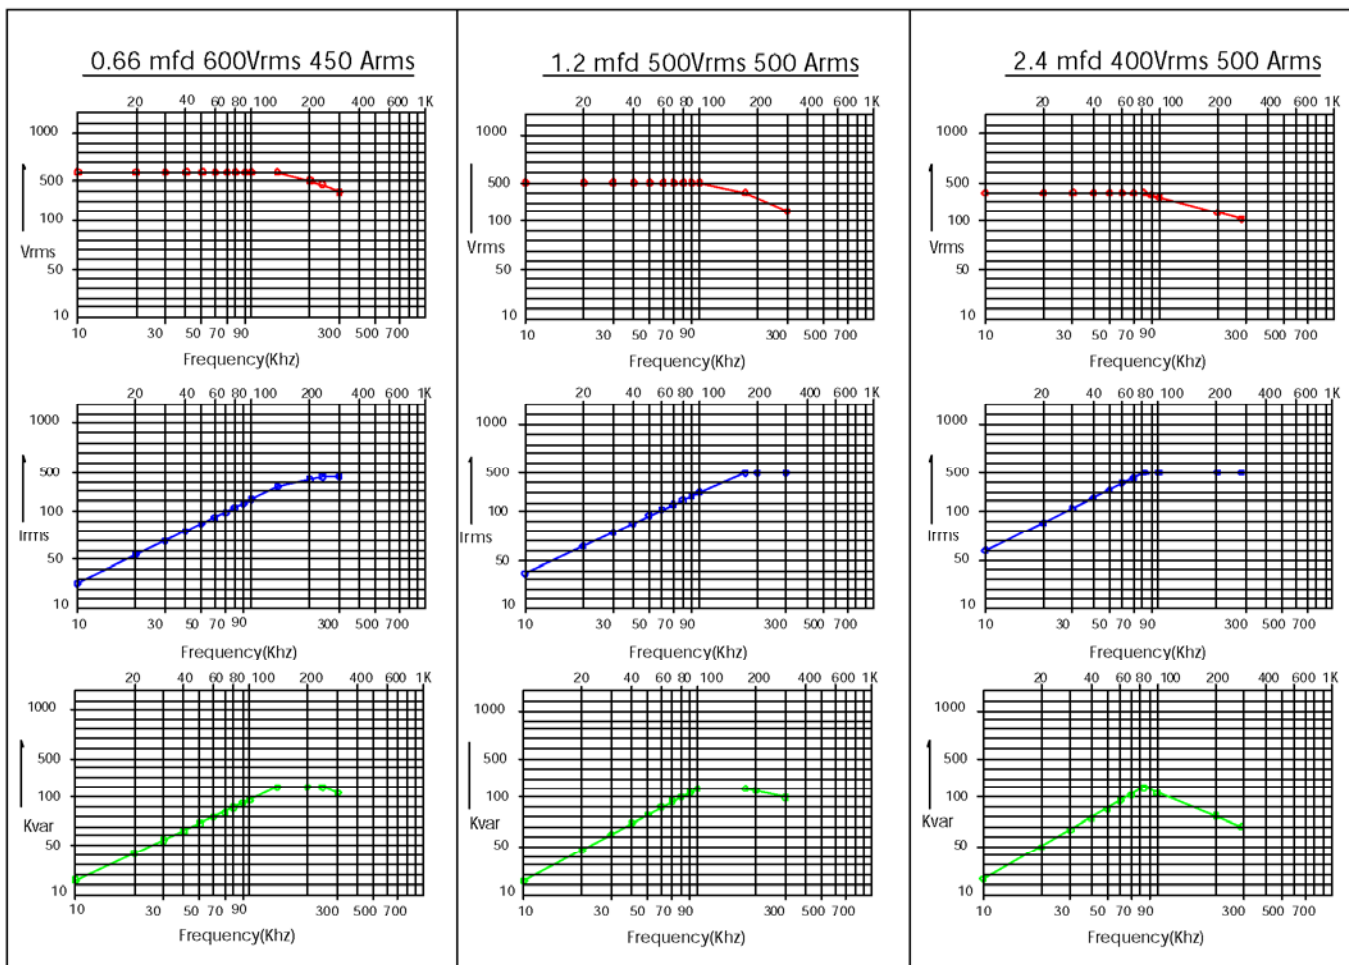

7170 N. Ridgeway
Lincolnwood, IL 60712
Ph: 847-675-1865
Fax: 847-675-3345
Email: sales@icd-sales.com
Website: www.icd-sales.com