



SERIES

MP5

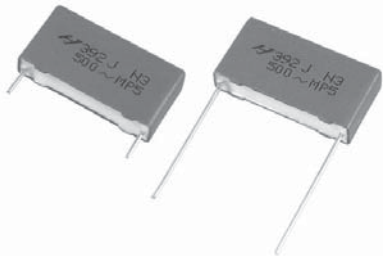

Metallized Polypropylene Film
 Metal spray layer
 Connecting wire

Construction:

Dielectric : Polypropylene Film .
 Electrodes : Single sided metallized polypropylene film.
 Winding : non-inductive type & internal series connection.
 Leads : Tinned Wire.
 Outer coating : Flame retardant plastic case and epoxy resin filled.

Feature:

Low Dissipation Factor at high frequency.
 Excellent corona voltage.
 High pulse strength.
 Small in size.

Recommended Application:

Electronic lighting (ballast & car headlamp).
 Switching power supply circuits.
 Pulse applications with high AC voltage and high current.

Electrical Characteristics:

Related Documents	IEC 60384-17;CECC 31900					
Rated Voltage(V _R)	300VAC(800VDC),400VAC(1000VDC),500VAC(1200VDC) 700VAC(1600VDC), 900VAC(2000VDC)					
Rated Temperature	~+85°C for V _R .					
Usable upper category temperature	+105°C. Derating ratio of rated voltage V _R to +85°C~+105°C:1.25% per °C for Rated Voltage V _R					
Capacitance Range	0.001 μF~0.1 μF.					
Capacitance Tolerance	±2%(G),±3%(H),±5%(J)					
Dissipation Factor	0.05% at 1Khz (C≤0.1 μF) 0.10% at 100Khz (C≤0.1 μF)					
Insulation Resistance	Terminal to Terminal:(at20±5°C) ≥50000MΩ for C≤0.1 μF at 100VDC × 1minute.					
Withstand Voltage	Terminal to Terminal:(at20°C ± 5°C) 1.6 × V _R applied for 2sec.					
Rated Voltage Pulse Slope dV/dt (V/μs)	V.R Pitch	300VAC	400VAC	500VAC	700VAC	900VAC
	10m/m	400	400	-----	-----	-----
	15m/m	500	1000	1400	3000	4000
	22.5m/m	250	500	700	1400	2500



Ph: 847-675-1865
Fax: 847-675-3345
Email: sales@icd-sales.com
Website: www.icd-sales.com

Reliability Test :

Item	Test Method	Requirements
Resistance to soldering heat IEC 60068-2-20"	Solder bath: 260°C ±5°C Immersion time: 10sec±1sec	Capacitance change $\Delta C/C$: ≤ 1% DF change $\Delta \tan \delta$: 0.1% at 1Khz IR: ≥ limit value.
Resistance to vibration IEC 60068-2-6"	Frequency range: 10hz to 55hz Amplitude: 1.5m/m Duration: 6 hours	There shall be no visible damage, no intermittent contact, no open or short circuit
Damp heat, steady state IEC 60068-2-3"	Temperature: 40°C ±2°C Relative humidity: 90% to 95% Duration: 1000 hours	Capacitance change $\Delta C/C$: ≤ 3% DF change $\Delta \tan \delta$: 0.1% at 1Khz IR: ≥ 50% limit value.
Endurance IEC 60384-17"	Temperature: 105°C ±2°C Voltage applied: 1.25 × Vc(AC) at 60Hz Duration: 2000 hours	Capacitance change $\Delta C/C$: ≤ 5% DF change $\Delta \tan \delta$: 0.1% at 1Khz IR: ≥ 50% limit value.

Cap.(μF)		Leads: 0.6dφ (P=10)												Leads: 0.8dφ (P>10)				Unit: m/m			
R.V.	Size Cap.	300VAC				400VAC				500VAC				700VAC				900VAC			
		W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P
.001						13.0	9.0	4.0	10.0	18.0	11.0	5.0	15.0	18.0	11.0	5.0	15.0	18.0	11.0	5.0	15.0
.0012						13.0	9.0	4.0	10.0	18.0	11.0	5.0	15.0	18.0	11.0	5.0	15.0	18.0	12.0	6.0	15.0
.0015						13.0	9.0	4.0	10.0	18.0	11.0	5.0	15.0	18.0	11.0	5.0	15.0	18.0	12.0	6.0	15.0
.0018						13.0	9.0	4.0	10.0	18.0	11.0	5.0	15.0	18.0	11.0	5.0	15.0	18.0	13.0	7.0	15.0
.0022						13.0	9.0	4.0	10.0	18.0	11.0	5.0	15.0	18.0	11.0	5.0	15.0	18.0	13.5	7.5	15.0
.0027						13.0	10.0	5.0	10.0	18.0	11.0	5.0	15.0	18.0	11.0	5.0	15.0	18.0	14.5	8.5	15.0
.0033						13.0	10.0	5.0	10.0	18.0	11.0	5.0	15.0	18.0	11.0	5.0	15.0	18.0	15.0	9.0	15.0
.0039						13.0	11.0	5.0	10.0	18.0	11.0	5.0	15.0	18.0	12.0	6.0	15.0	18.0	17.0	10.0	15.0
.0047						13.0	11.0	5.5	10.0	18.0	11.0	5.0	15.0	18.0	12.0	6.0	15.0	18.0	18.0	10.0	15.0
.0056	13.0	10.0	5.0	10.0	13.0	12.0	6.0	10.0	18.0	11.0	5.0	15.0	18.0	13.0	7.0	15.0	18.0	19.0	12.0	15.0	
.0068	13.0	11.0	5.0	10.0	18.0	11.0	5.0	15.0	18.0	12.0	6.0	15.0	18.0	13.5	7.5	15.0	26.0	15.0	6.0	22.5	
.0082	13.0	11.0	5.5	10.0	18.0	11.0	5.0	15.0	18.0	13.0	7.0	15.0	18.0	14.0	8.0	15.0	26.0	16.0	7.0	22.5	
.01	13.0	12.0	6.0	10.0	18.0	11.0	5.0	15.0	18.0	13.0	7.0	15.0	18.0	14.5	8.5	15.0	26.0	16.5	7.5	22.5	
.012	13.0	12.0	6.0	10.0	18.0	12.0	6.0	15.0	18.0	13.5	7.5	15.0	18.0	16.0	10.0	15.0	26.0	17.0	8.5	22.5	
.015	13.0	13.0	7.0	10.0	18.0	12.0	6.0	15.0	18.0	14.5	8.5	15.0	18.0	17.0	10.0	15.0	26.0	18.5	10.0	22.5	
.018	13.0	14.0	8.0	10.0	18.0	13.0	7.0	15.0	18.0	15.0	9.0	15.0	18.0	19.0	11.0	15.0	26.0	20.0	11.0	22.5	
.022	18.0	12.0	6.0	15.0	18.0	13.5	7.5	15.0	18.0	16.0	10.0	15.0	26.0	17.0	8.0	22.5	26.0	21.5	12.0	22.5	
.027	18.0	13.0	7.0	15.0	18.0	14.5	8.5	15.0	18.0	17.5	11.0	15.0	26.0	18.0	9.0	22.5					
.033	18.0	13.5	7.5	15.0	18.0	15.0	9.0	15.0	26.0	17.0	8.0	22.5	26.0	18.5	10.0	22.5					
.039	18.0	14.0	8.0	15.0	18.0	16.0	10.0	15.0	26.0	18.5	8.5	22.5	26.0	20.0	11.0	22.5					
.047	18.0	15.5	8.0	15.0	18.0	17.5	11.0	15.0	26.0	18.5	10.0	22.5	26.0	20.0	11.5	22.5					
.056	18.0	16.0	9.0	15.0	26.0	17.0	8.5	22.5	26.0	19.0	10.0	22.5	26.0	22.0	12.5	22.5					
.068	18.0	17.0	10.0	15.0	26.0	18.0	9.0	22.5	26.0	20.0	11.5	22.5	26.0	23.0	14.5	22.5					
.082	26.0	17.0	8.0	22.5	26.0	19.0	10.0	22.5	26.0	22.0	12.5	22.5	26.0	25.0	16.0	22.5					
0.1	26.0	18.5	8.5	22.5	26.0	20.0	11.0	22.5													
0.12	26.0	18.5	10.0	22.5																	
0.15	26.0	20.0	11.0	22.5																	