


PRODUCTS SPECIFICATION

Description	Symbol	Dimensions(mm)
Component diameter	D	4.5 to 14.7
Body length	L	11 to 33
Component pitch	A*	See table I
Reel core diameter	E	85
Arbor hole diameter	M	30
Reel diameter	φ	355 max
Tape width	H	6±0.5
Body location(lateral deviation)	G	≤0.7
Body location(longitudinal deviation)	N	≤1.2
Tape spacing	B	See Table II
Lead length from the component body to the adhesive tape	I	≥20
Distance between reel flanges	C	See table II

Technical terms: IEC 286-1

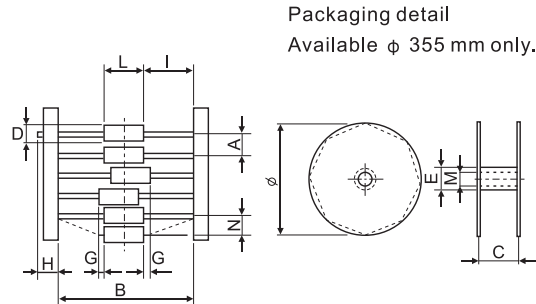

Packaging detail
Available φ 355 mm only.

Remarks

*Cumulative pitch tolerance must not exceed 1.5 mm over six consecutive components.

Table I

D max (mm)	A (mm)
≤5	5 ± 0.5
5.1 to 9.5	10 ± 0.5
9.6 to 14.7	15 ± 0.5

Table II

L max (mm)	Class	B±1,5 (mm)	C (mm)
≤11	I	52,4	75
14.0 to 20.5	II	63,6	86
≥26	II	73,0	98

NUMBER OF PIECES FOR PACKING UNIT

D max (mm)	L max (mm)	Loose (pcs)	Reel φ 355mm (pcs)
5	11	1500	3000
5.1 to 6.5	11	1500	1300
6.0 to 6.5	14.0 to 16.5	2000	1300
6.6 to 7.0	14.0 to 16.5	2000	1200
7.1 to 7.5	14.0 to 16.5	1500	1100
7.6 to 8.0	14.0 to 16.5	1250	1000
8.1 to 8.5	14.0 to 16.5	1250	900
8.6 to 9.5	14.0 to 16.5	1000	800
9.6 to 10.5	14.0 to 16.5	1000	600
6.5 to 7.0	18.8 to 20.5	1250	1200
7.1 to 7.5	18.8 to 20.5	1250	1100
7.6 to 8.0	18.8 to 20.5	1000	1000
8.1 to 8.5	18.8 to 20.5	1000	900

NUMBER OF PIECES FOR PACKING UNIT

D max (mm)	L max (mm)	Loose (pcs)	Reel φ 355mm (pcs)
8.6 to 9.5	18.8 to 20.5	750	800
9.6 to 10.5	18.8 to 20.5	750	600
10.6 to 13.0	18.8 to 20.5	500	400
8.1 to 8.5	26.5 to 28.0	750	900
8.6 to 9.5	26.5 to 28.0	500	800
9.6 to 10.5	26.5 to 28.0	500	600
10.6 to 12.0	26.5 to 28.0	500	400
12.1 to 13.0	26.5 to 28.0	300	400
13.1 to 14.5	26.5 to 28.0	300	300
14.6 to 15.5	26.5 to 28.0	300	250
11.0 to 12.0	31.5 to 33.0	400	400
12.1 to 13.0	31.5 to 33.0	300	400
13.1 to 14.5	31.5 to 33.0	300	300



Ph: 847-675-1865
 Fax: 847-675-3345
 Email: sales@icd-sales.com
 Website: www.icd-sales.com