

# CHIP TYPE

# CN

Series

Surface-Mounted Device



- Height : 5.4mm.
- Load life : 85°C 2000 hours.
- Non polarity series using in polarity circuits




## SPECIFICATION

Item	Characteristic							
Operation Temperature Range	-40 ~ +85°C							
Rated Working Voltage	6.3 ~ 50VDC							
Capacitance Tolerance (120Hz 20°C)	±20%(M)							
Leakage Current (20°C)	I ≤ 0.05CV or 10 (μA)				I : Leakage Current (μA)			
	*Whichever is greater after 2 minutes				C : Rated Capacitance (μF)			
Surge Voltage (20°C)	W.V.	6.3	10	16	25	35	50	
	S.V.	8	13	20	32	44	63	
Dissipation Factor (tan δ) (120Hz 20°C)	W.V.	6.3	10	16	25	35	50	
	tan δφ	0.26	0.22	0.20	0.20	0.20	0.18	
Low Temperature Stability	Impedance ratio at 120Hz							
	Rated Voltage (V)	6.3	10	16	25	35	50	
	-25°C / +20°C	4	3	2	2	2	2	
	-40°C / +20°C	8	6	4	4	3	3	
Load Life	After 2000 hours application of W.V. and +85°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage ≤ rate working voltage) (The polarity need to exchange every 250 hours)							
	Capacitance Change	≤ ±25% of initial value						
	Dissipation Factor	≤ 200% of initial specified value						
	Leakage current	≤ initial specified value						
Shelf Life	At +85°C, no voltage application after 1000 hours, the capacitor shall meet the limits for load life characteristics. (With voltage treatment)							
Resistance to Soldering Heat	Capacitors placed on a 250°C hot plate for 30 seconds with their electrode terminals facing downward will fulfill the following conditions after being cooled to room temperature.							
	Capacitance Change	≤ ±10% of initial value						
	Dissipation Factor	≤ initial specified value						
	Leakage current	≤ initial specified value						

## DIMENSIONS (mm)

D	L	A	H	I	W	P	K
4.0	5.4	4.3	5.5MAX	1.8	0.65±0.1	1.0	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
5.0	5.4	5.3	6.5MAX	2.2	0.65±0.1	1.5	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
6.3	5.4	6.6	7.8MAX	2.6	0.65±0.1	2.1	0.35 <sup>+0.15</sup> <sub>-0.20</sub>

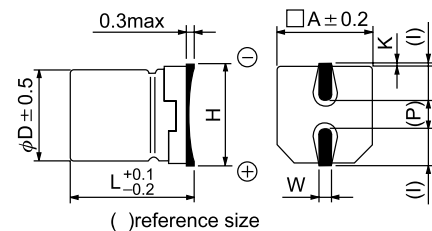

7170 N. Ridgeway  
 Lincolnwood, IL 60712  
 Ph: 847-675-1865  
 Fax: 847-675-3345  
 Email: sales@icd-sales.com  
 Website: www.icd-sales.com

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)  
 Max ripple current : mA(rms) 85°C 120Hz

μF	V(Code) Code Item	6.3 (0J)		10 (1A)		16 (1C)		25 (1E)		35 (1V)		50 (1H)	
		DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.1	0R1											4x5.4	2
0.22	R22											4x5.4	3
0.33	R33											4x5.4	4
0.47	R47											4x5.4	5
1.0	010											4x5.4	7
2.2	2R2									4x5.4	10	5x5.4	12
3.3	3R3							5x5.4	13	5x5.4	14	5x5.4	14
4.7	4R7					4x5.4	14	5x5.4	16	5x5.4	17	6.3x5.4	19
10	100			4x5.4	19	5x5.4	23	6.3x5.4	27	6.3x5.4	28		
22	220	5x5.4	29	6.3x5.4	36	6.3x5.4	39						
33	330	6.3x5.4	41	6.3x5.4	45	6.3x5.4	48						
47	470	6.3x5.4	49										