


RADIAL TYPE

NC Series

Non Polarity, For Twinkling Light of Automobile



- Suitable for the direction light of automobile and motorcycle.




● SPECIFICATION

Item	Characteristic
Operation Temperature Range	-40 ~ +85°C
Rated Working Voltage	13VDC
Capacitance Tolerance (120Hz 20°C)	±10%(K) ±20%(M) +20% -10%(V)
Leakage Current (20°C)	$I \leq 1000 (\mu A)$ Under 100Ω resistor series and rated voltage applied whichever after 3 minutes. I : Leakage Current (μA) C : Rated Capacitance(μF) V : Working Voltage (V)
Dissipation Factor (tan δ) (120Hz 20°C)	$\tan \delta \leq 0.50$

● DIMENSIONS (mm)

φD	10	12.5
F	5.0	5.0
d	0.6	0.6
α	1.5	1.5

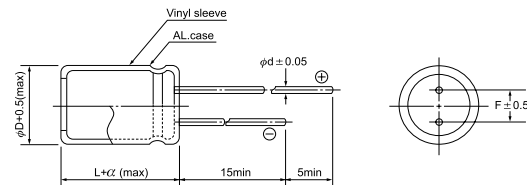

● CASE SIZE & MAX RIPPLE CURRENT

Case size: D x L (mm)

μF	V(Code)		13 (1P)
	Code	Item	DxL
1500	152		10x25
1700	172		12.5x20
2200	222		12.5x25



7170 N. Ridgeway
Lincolnwood, IL 60712
Ph: 847-675-1865
Fax: 847-675-3345
Email: sales@icd-sales.com
Website: www.icd-sales.com