


RADIAL TYPE

NT

Series 5mmL 85°C, Non Polarity



- Non polarity series with 5mm height




SPECIFICATION

Item	Characteristic							
Operation Temperature Range	-40 ~ +85°C							
Rated Working Voltage	6.3 ~ 50VDC							
Capacitance Tolerance (120Hz 20°C)	±20%(M)							
Leakage Current (20°C)	$I \leq 0.05CV$ or $10 (\mu A)$				I : Leakage Current (μA)			
	*Whichever is greater after 2 minutes				C : Rated Capacitance (μF) V : Working Voltage (V)			
Surge Voltage (20°C)	W.V.	6.3	10	16	25	35	50	
	S.V.	8	13	20	32	44	63	
Dissipation Factor (tan δ) (120Hz 20°C)	W.V.	6.3	10	16	25	35	50	
	tan δ	0.24	0.20	0.17	0.17	0.15	0.15	
Low Temperature Stability	Impedance ratio at 120Hz							
	Rated Voltage (V)	6.3	10	16	25	35	50	
	-25°C / +20°C	4	3	2	2	2	2	
	-40°C / +20°C	10	8	6	4	3	3	
Load Life	After 1000 hours application of W.V. and +85°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage \leq rate working voltage) (The polarity need to exchange every 250 hours)							
	Capacitance Change	$\leq \pm 20\%$ of initial value						
	Dissipation Factor	$\leq 200\%$ of initial specified value						
	Leakage current	\leq initial specified value						
Shelf Life	At +85°C no voltage application after 500 hours the capacitor shall meet the limits for load life characteristics. (with voltage treatment)							

DIMENSIONS (mm)

ϕD	4	5	6.3
F	1.5	2.0	2.5
d	0.45	0.45	0.45
α	1.0	1.0	1.0

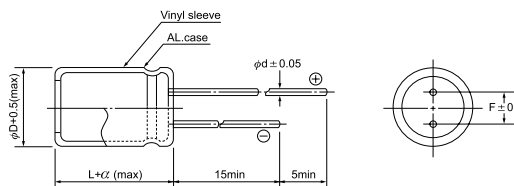

CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)
Max ripple current : mA(rms) 85°C 120Hz

μF	V(Code) Code Item	6.3 (0J)		10 (1A)		16 (1C)		25 (1E)		35 (1V)		50 (1H)	
		DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.1	0R1									→	4x5	1	
0.22	R22									→	4x5	2	
0.33	R33									→	4x5	2.8	
0.47	R47									→	4x5	4	
1.0	010									→	4x5	8.4	
2.2	2R2								→	4x5	8.4	5x5	13
3.3	3R3						→	5x5	12	5x5	16	5x5	17
4.7	4R7				→	4x5	12	5x5	16	5x5	18	6.3x5	20
10	100	4x5	14	4x5	17	5x5	23	6.3x5	27	6.3x5	29		
22	220	5x5	28	6.3x5	33	6.3x5	37						
33	330	6.3x5	37	6.3x5	41	6.3x5	49						
47	470	6.3x5	45										

All blank voltage on sleeve marking is the same voltage as " → "point to.



7170 N. Ridgeway
Lincolnwood, IL 60712
Ph: 847-675-1865
Fax: 847-675-3345
Email: sales@icd-sales.com
Website: www.icd-sales.com